

LX-8 LX-8

Advanced Flexible Mounter

High Productivity
High Flexibility
High Quality

Advanced Flexible Mounter

JUKI




Innovative & Invebtive
Design Excellence
Award

JUKI



JUKI Smart Solutions

Grand Prize of Minister of Economy, Trade and Industry Award 54th Innovative & Invebtive Design Excellence Award

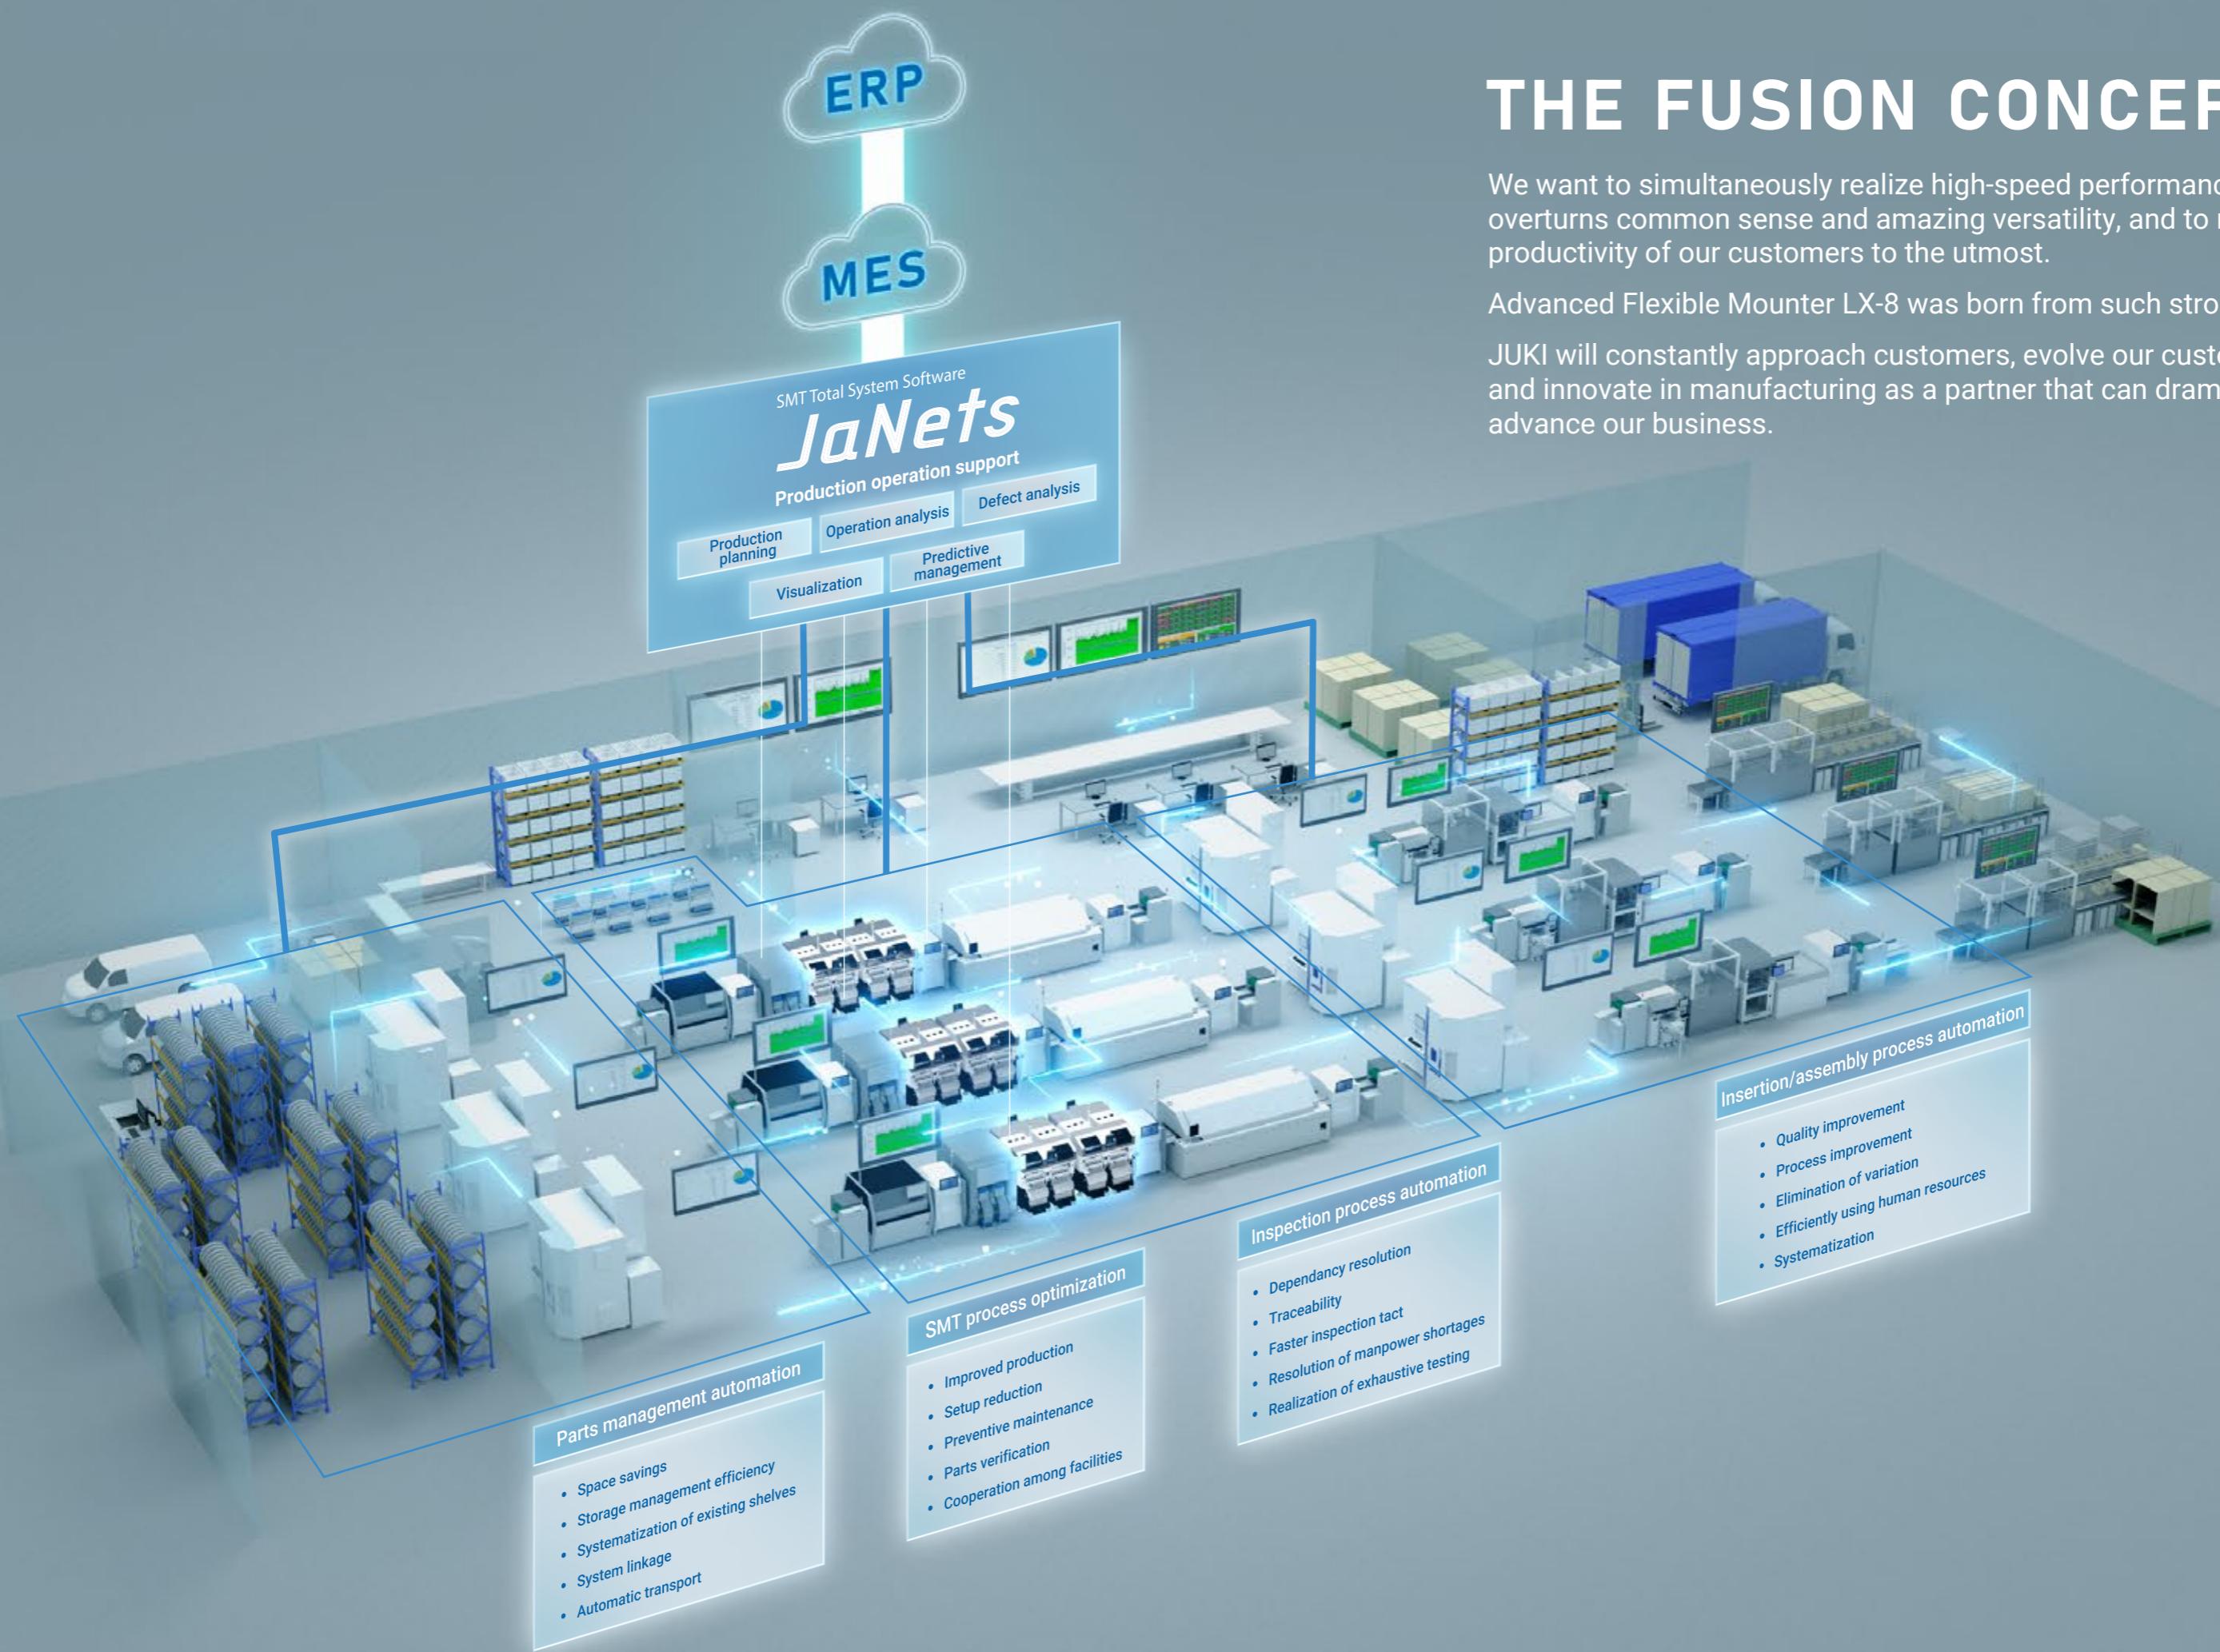

THE FUSION CONCEPT

We want to simultaneously realize high-speed performance that overturns common sense and amazing versatility, and to raise the productivity of our customers to the utmost.

Advanced Flexible Mounter LX-8 was born from such strong wishes.

JUKI will constantly approach customers, evolve our customers' factories, and innovate in manufacturing as a partner that can dramatically advance our business.

High Productivity



Achieves high-efficiency production through high area productivity and ultra-high speed equipment of the highest level in its class

It boasts the highest 105,000CPH in its class*, and is equipped with ultra-high speed, space-saving features, while boasting high area productivity and achieving highly efficient production.

The Planet head P20S supports mounting of 0201 very small parts.

In addition, even large components and other highly versatile design heads can be equipped with ultra-high speed 94,000CPH that are among the highest in their class.

*For P20S head x 2



Planet head P20S/Takumi head, selectable for each characteristic

NEW P20S head


Planet head P20S has a planet-head construction that sucks continuously with 20 nozzles. Even a very small part of 0201 achieves stable suction reliability. In addition, the head height is variable (0.5 mm / 2 mm/3 mm) according to the component to achieve high-speed mounting in order to mount the component at the highest speed.



Takumi head



TAKUMI head for high-precision laser recognition adjusts head height to match placement component height. High-speed mounting is realized at the optimum height from very small parts to large parts.

[Variable height of the laser sensor in accordance with the component height]

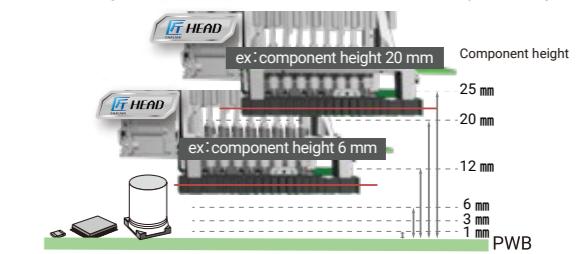

Front operation possible


LX-8 allows front-side banks to operate without loss of productivity. There is no need to set feeders in both the front and rear banks, making production preparation more efficient.

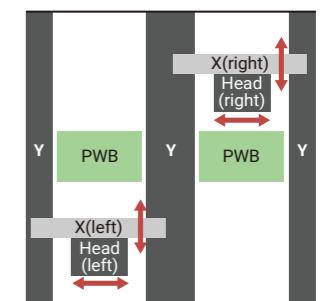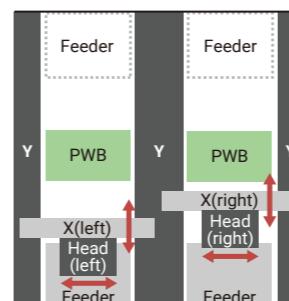

Feeder-mounted number-class No.1

The number of feeder slots is 160 or more, the highest in the class. Since it is possible to set the next feeder for production in the feeder bank beforehand, the setup change time can be drastically shortened, and production preparation can be simplified and made more efficient.

*Contact us for details.

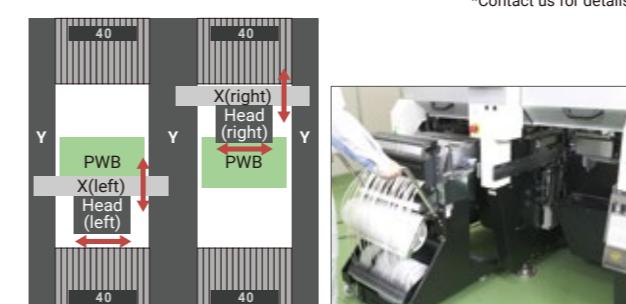


NEW New User Interface pursuing ease of use

A smartphone-like operating feel that can be operated with intuition, color-conscious for all users and easy-to-view screens in dark themes, and high-priority functions have been placed on the top screen. This is a new type of operation panel that pursues ease of use.



*Please contact us for P20S head

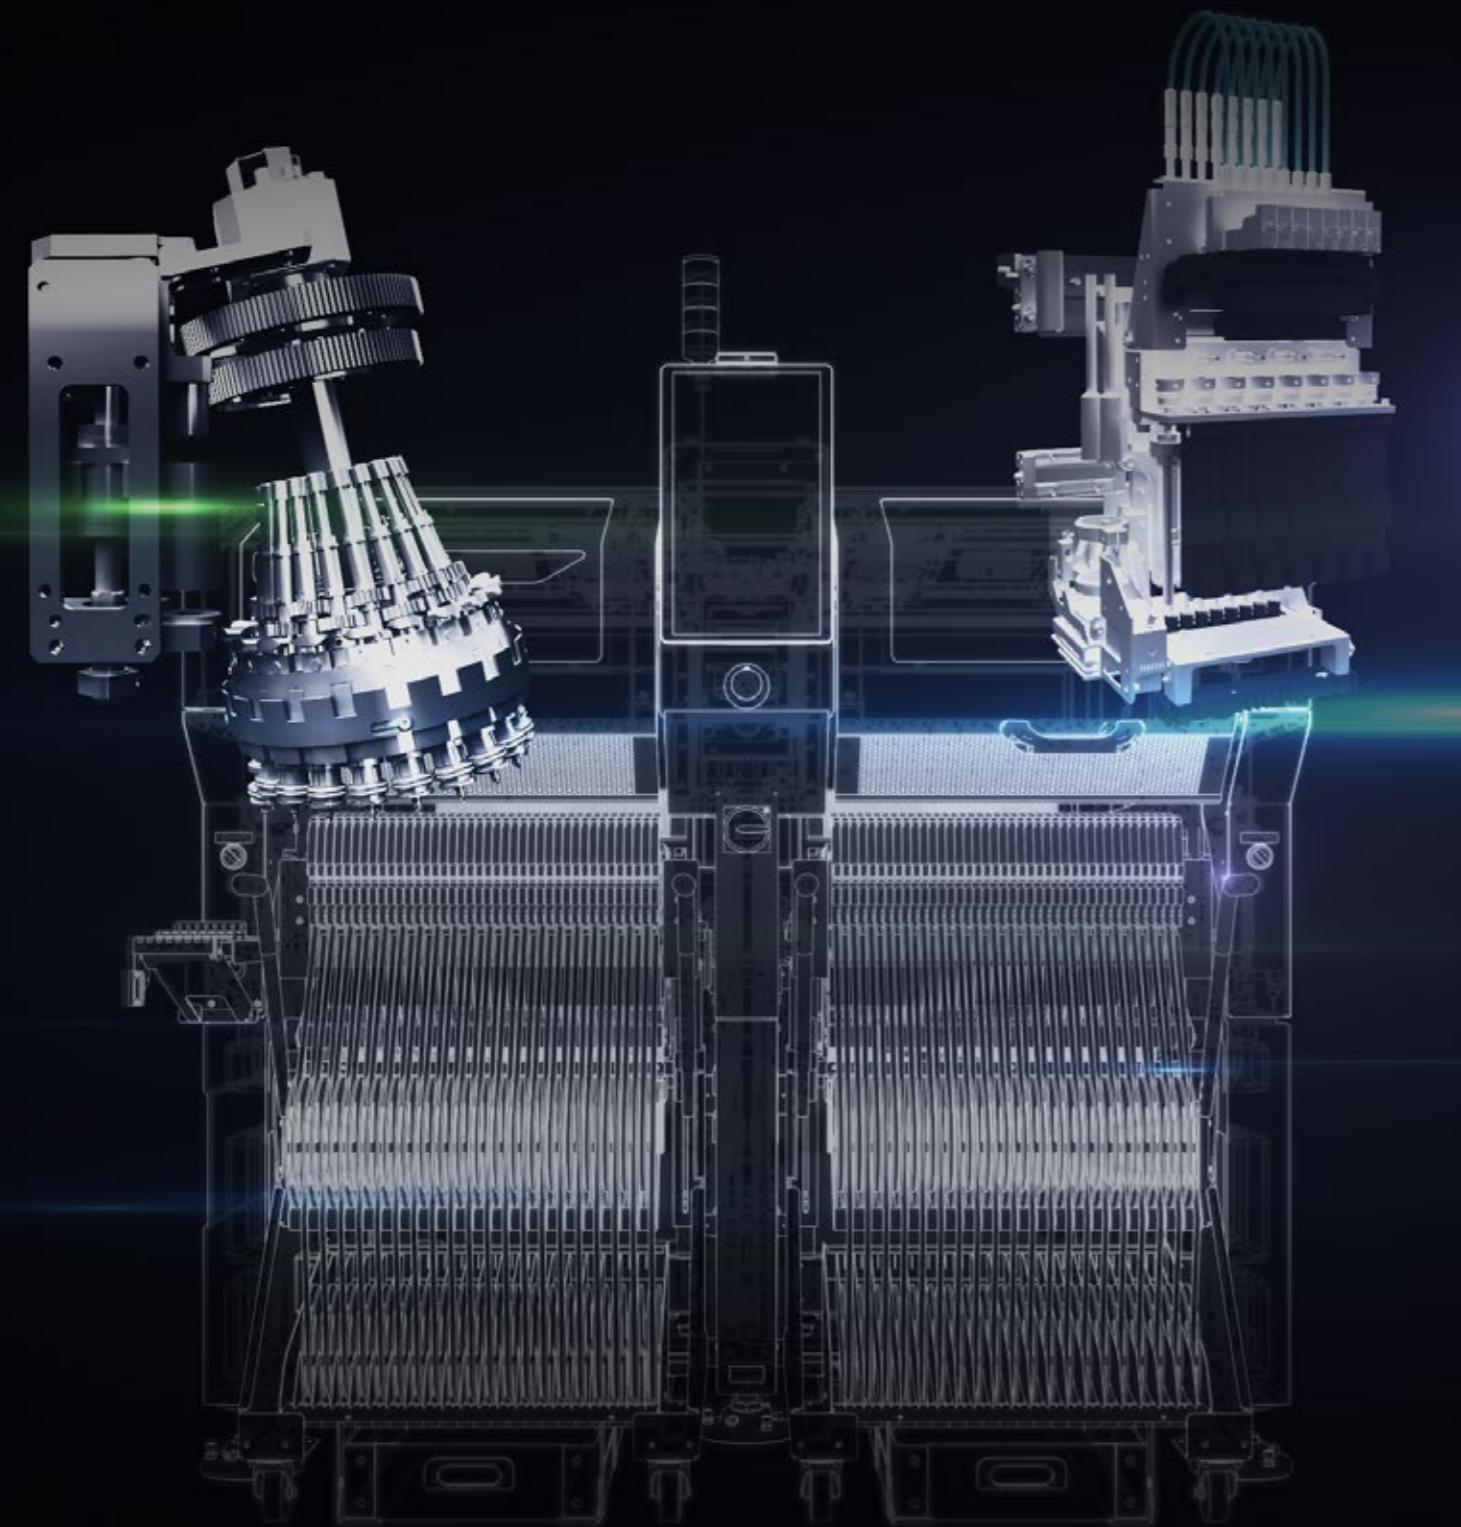


High Flexibility

Head replacement

The head of LX-8 can be replaced.

By simply placing the heads optimally without changing the line layout, the machine can flexibly respond to variable and variable-quantity production.

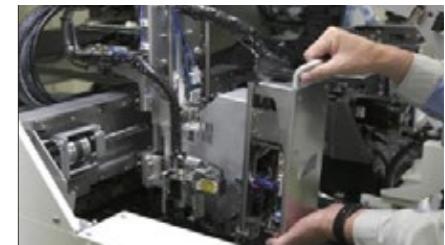


Flexible head configuration

Head can be replaced by the user. It can flexibly respond to changes in production boards.


LX-8 line

Balanced specifications that combine high-speed and versatility

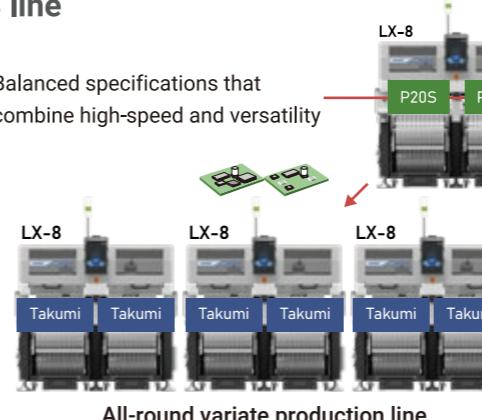

All-round variate production line

Flexible response to sudden changes in production items by replacing the head. Achieves optimal throughput independent of the type of components on the board.

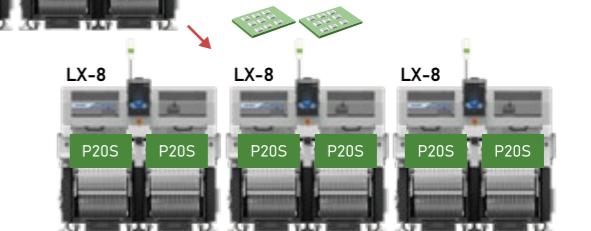


Ultra-high-speed and high-density mounting specifications

Line-up with the current JUKI mounter

By adding LX-8 to existing JUKI mounters, flexible line construction can be realized, including high-speed lines, high-speed general-purpose lines, and ultra-general lines.

When LX-8 design head is mounted on the pre-existing RX-8


High-production general-purpose line with enhanced high-speed and general-purpose capabilities

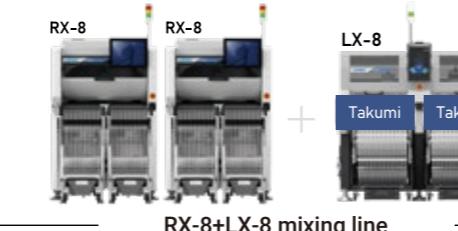

RX-8+LX-8 mixing line

When LX-8 Planet head P20S is added to a pre-existing RS-1R

Flexible and high-efficiency high-balance line that can be mounted on irregular shaped parts

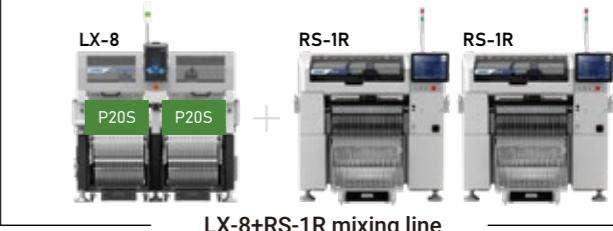


LX-8+RS-1R mixing line

Wide component range

Supports components from 0201* (metric) up to 65 mm square or 10 x 90 mm. In addition, component height up to 25 mm, so it is possible to mount a wide range of components.

*Contact us for details.

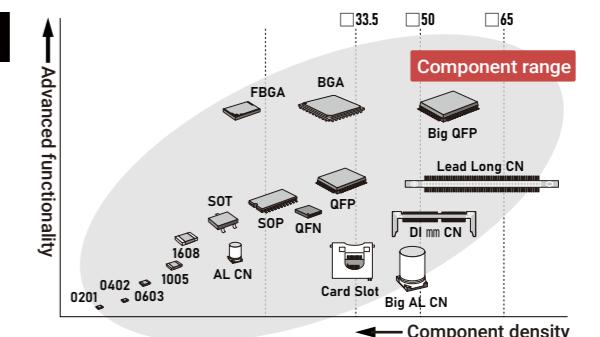

Large parts are supplied in trays

By using a tray server TR8 in which the main unit head sucks parts directly from the tray, it is possible to suck irregularly shaped parts such as connectors and heavy parts directly with the head.




Optimal for LED placement

With Planet head P20S, stable recognition can be achieved even with continuous-mounting, enabling high-quality mounting for producing LED indicator lamps.




*Please contact us for P20S head

High Quality

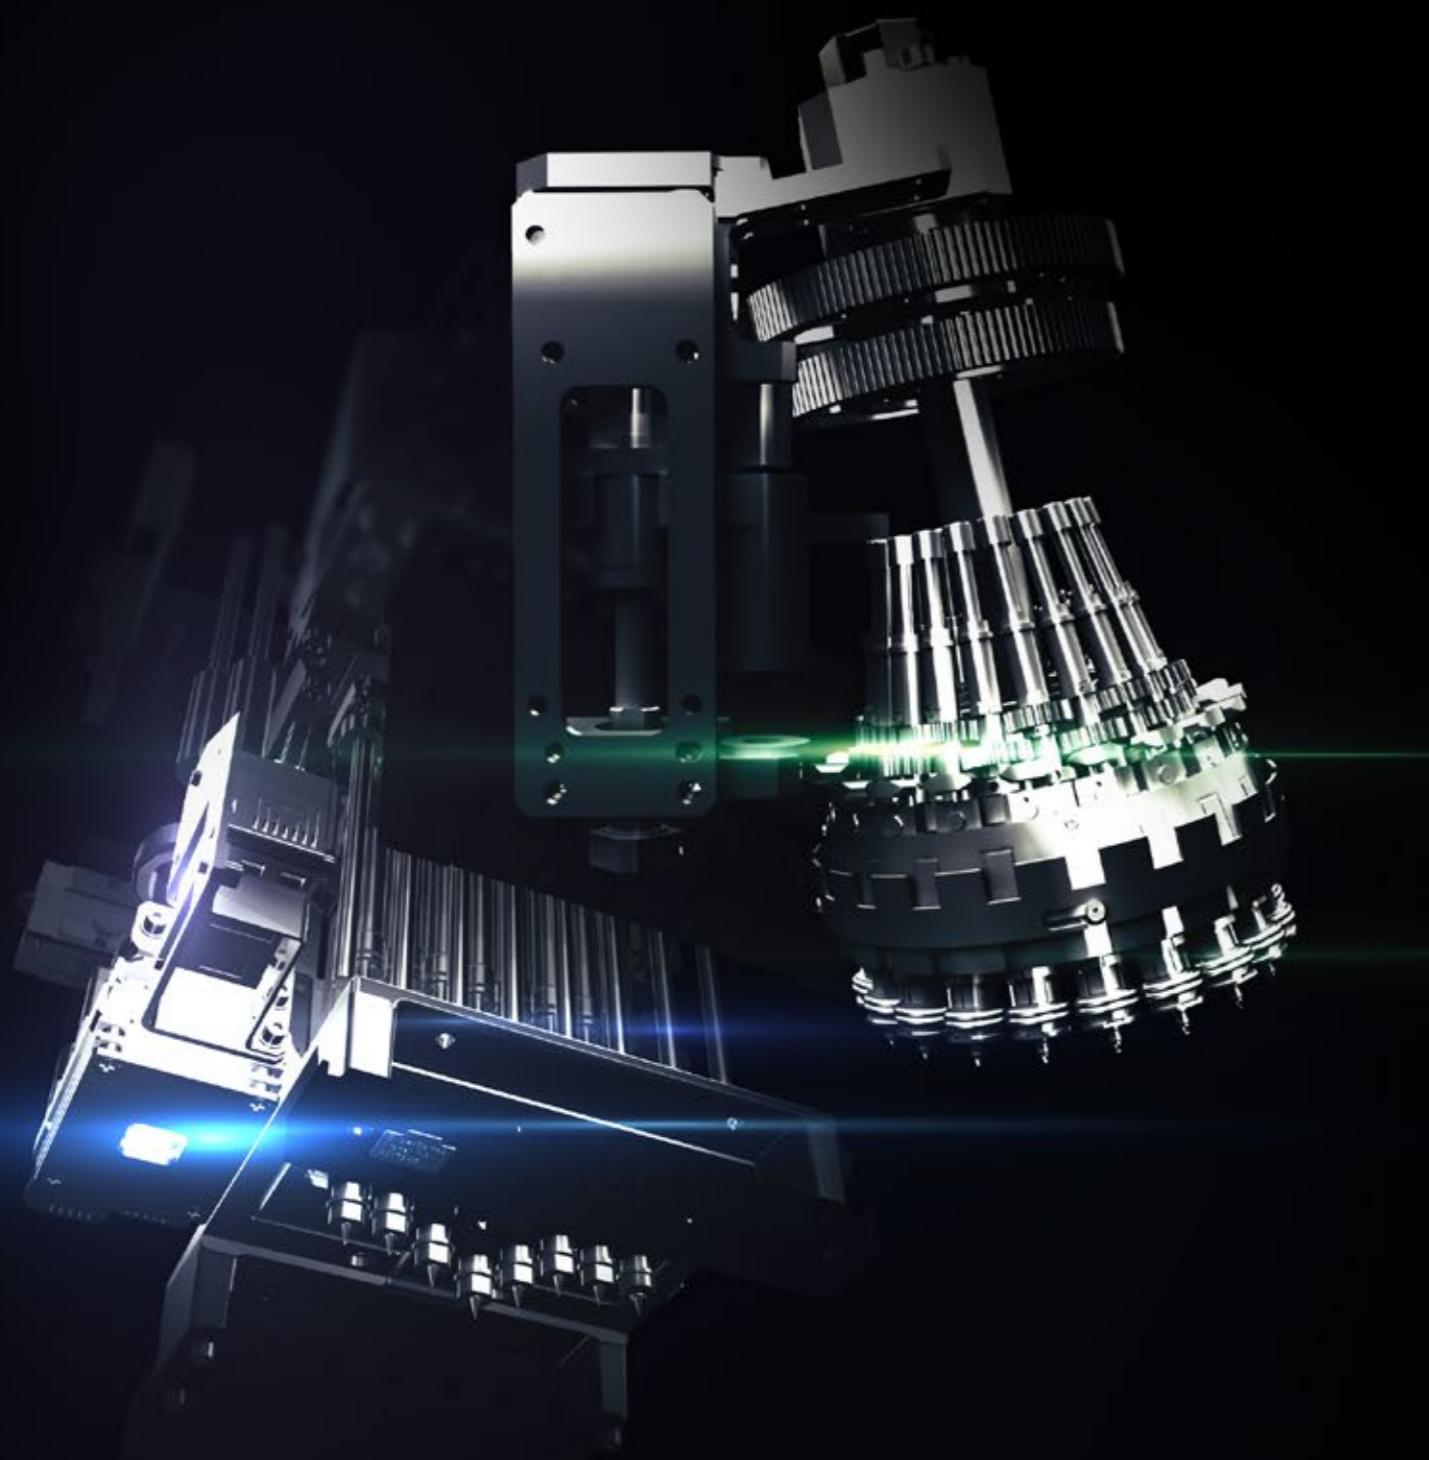

Low impact placement for flexible circuits



Low impact feature allows separately adjusting the down and up speed of the nozzle during placement. This minimizes the load on the part and on the board during placement. This is optimal for placing very small parts that require a lot of accuracy.

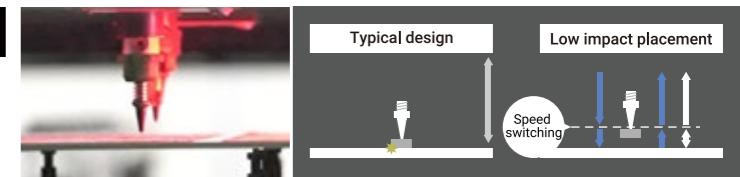

NEW P20S head

State-of-the-art centering and inspection vision system


With Planet head P20S, it is possible to detect the reversal of the front and back sides, inspect the tip standing, and detect the presence or absence of components. Realizes high-quality mounting of extremely small parts.

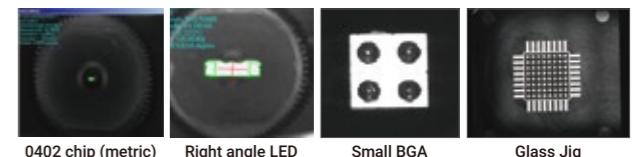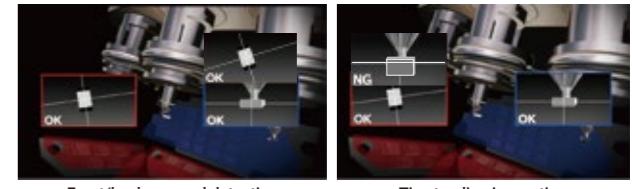

Takumi head


Realizes high-speed, high-precision recognition with JUKI's proud laser-recognition technique

Various component shape can be recognized, such as SOP, QFP, BGA from 03015 minimal component to □50mm. Laser recognition realizes stable recognition and mounting without being affected by component variations such as electrode-shape and gloss.

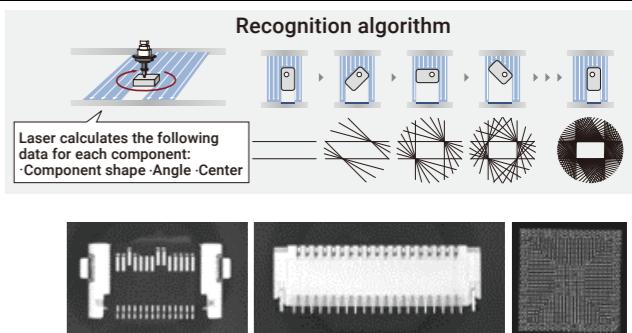


Reduction of VCS image-recognition times

The adoption of an image-processing library HALCON has greatly reduced image-recognition times using VCS. It realizes high-speed recognition and mounting in not only chip components but also large components.

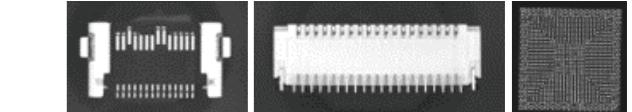

Component image-recognition technology

Component shape, lead and ball details are accurately captured using our VCS camera. Component problems such as missing ball detection or bent leads are also detected. We can deal with not only QFP and BGA, but also irregular components in individual pattern-recognition.

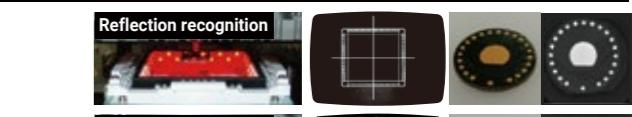

360 degree part recognition technology

Components that are supplied incorrectly can be corrected and accurately placed using 360 degree recognition technology.



Three color recognition lighting

The color of lighting can be changed to match the component requirements for stable, accurate centering.



Wide component range

Hundreds of nozzles to choose from and vision* to support difficult parts. Simplified data creation make it easy to handle complex components.


* Please contact for detail



Faster image recognition*

Head is moved along the X-axis to capture images, enabling high-speed non-stop image recognition.


* Please contact for detail

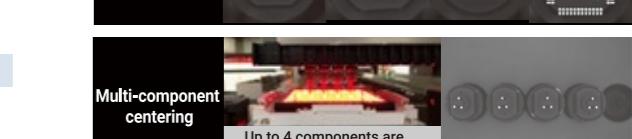


NEW New type of coplanarity sensor

Simultaneous image-recognition and coplanarity inspection greatly improves placement tact compared with the conventional machine. High accuracy and high speed coplanarity checking prevent placement of defective component and enhance the reliability of the device.

* Please contact for detail

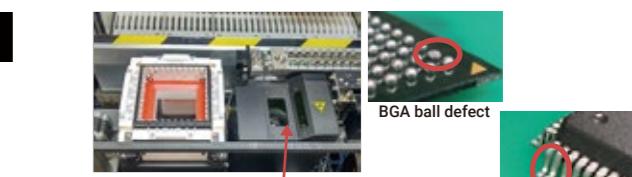

*Please contact us for P20S head

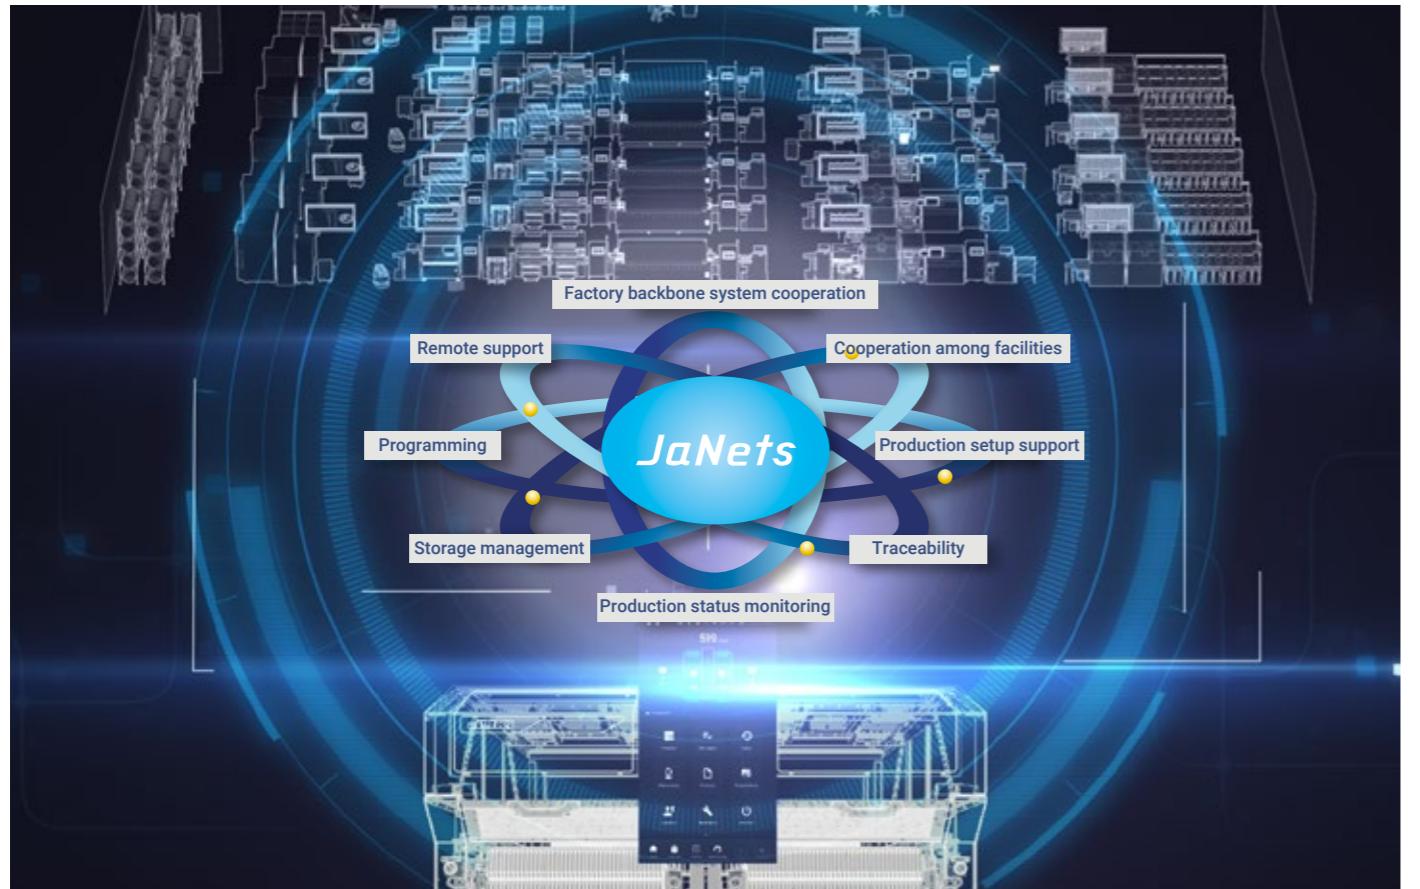


Integrates seamlessly with the production environment

SMT total system software JaNets and the system connected via JaNets help improve production efficiency across the entire plant by monitoring production status, storage-management, and remote-support. In addition, IFS-NX option enables high-quality production, such as traceability and component mis-mounting protection.

Communicates and shares information with other equipment

Bad mark information of the circuit detected by the inspection machine or a machine upstream of the line can be propagated to the LX-8 in order to reduce the bad mark recognition time and improve productivity.


* Please contact for detail

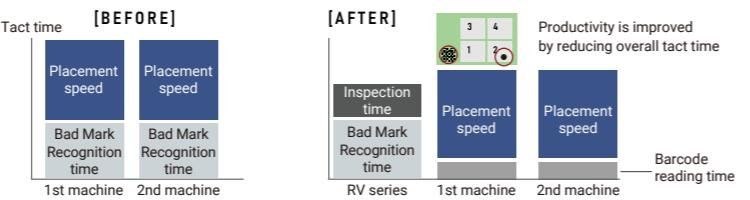

Feed forward for printing misalignment*


The SPI results can be fed forward to the mounter and applied as a placement offset to reduce defects.

* Applicable models are RV series and LX-8
* Please contact for detail

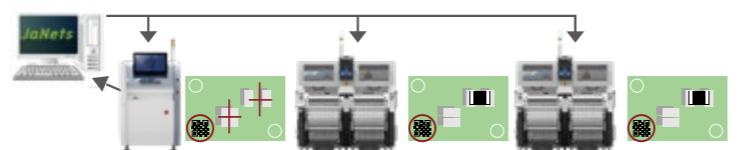

Component Management with Auto replenishment

Efficient production can be achieved through various linkages, including parts management processes, such as automatic shipping of parts from automatic warehouses at the time of setup, as well as automatic shipping with warnings of parts shortage during production.

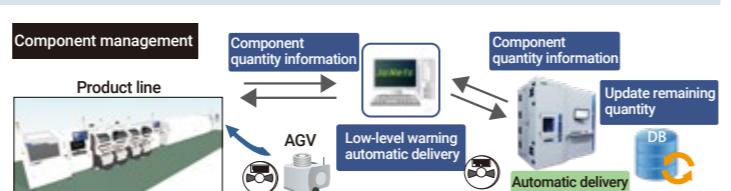

Specifications

| Advanced Flexible Mounter LX-8 | | | |
|--------------------------------|-------------------|---|--|
| | P20S*1×P20S*1 | P20S*1×Takumi | Takumi×Takumi |
| Board size | Minimum | 50×50 mm | |
| | Single clamping | 410×400 mm | |
| | Double clamping*1 | 810×400 mm *2 | |
| Component height | | 3 mm | 25 mm |
| Component size | Minimum | 0201*1 | |
| | Maximum | □5 mm | □65 mm / 10 mm × 90 mm / 50 mm × 75 mm |
| Placement speed (optimum) | | 105,000CPH | 99,500CPH |
| Placement accuracy | | ±40µm Cpk≥1 | ±35µm Cpk≥1*3 |
| Feeder capacity | Tape | Max. 136 | Max. 148 |
| | Tray*4 | — | Max. 30 |
| Power | | 3-phase AC200V (standard) AC200V ~ AC415V (when optional transformer is selected) | |
| Apparent power | | 2.49 kVA | |
| Operating air pressure | | 0.5±0.05MPa | |
| Air consumption (standard) | | 50L /min (ANR) | |
| Machine dimensions (W×D×H)*5 | | 1,600 mm × 1,924 mm × 1,440 mm | |
| Mass (approximately) | | 2,400kg or less | |

*1 Please contact for detail

*2 Factory default

*3 For laser recognition

*4 For TR8SR

*5 D dimension does not include the front operation monitor. H dimension does not include signal tower.

Options

| Advanced Flexible Mounter LX-8 | |
|--------------------------------|---|
| Recognitions system | 54 mm view camera |
| Inspection function | Coplanarity sensor* / Component Verification System(CVS)* |
| Conveyor | Support pin / Support sponge |
| Electrical protection | CE compatible specification / Ground-fault interrupter |
| Software | JaNets* / IFS-NX* |
| Component handling and feeders | Electric tape feeder (RF) / Electric stick feeder(Type-N)* / Matrix tray server TR8SR / Matrix tray changer TR6DNV */ Dual tray server TR1RB* / Tray Holder / Tape reel mounting base(for RF) / Splicing jig / Electric Trolley Power Station (PW02)* |
| Others | RS-1R • RS-1 nozzles(with RFID tags) / RFID (Nozzle individual control) / FCS calibration jig / Rear monitor |

* Please contact for detail

 Products complied with JUKI SUSTAINABLE PRODUCTS Standard (JUKI own standard)

The products are paying attention to environmental impact reduction, better working environment and helping create smart factory.

JUKI

MANUFACTURE SELLER JUKI CORPORATION

INQUIRY JUKI AUTOMATION SYSTEMS CORPORATION 2-11-1,Tsurumaki, Tama-shi, Tokyo 206-8511, JAPAN

JUKI AUTOMATION SYSTEMS GMBH. www.juki-smt.com

JUKI AMERICA, INC. www.juki-americas.com

JUKI(CHINA)CO., LTD. www.jukichina.com

JUKI INDIA PVT. LTD. www.smtjukiindia.com

JUKI (THAILAND) CO., LTD. www.juki-thailand.com



JUKI CORPORATION HEAD OFFICE
The activities of research, development, design, sales, distribution and maintenance services of sewing machines, household sewing machines and industrial robots, etc., including sales and maintenance services of data entry systems,

www.juki.co.jp

*Please refer to the product specifications for details. Specifications and appearance may be changed without notice.

Sep- 2024/Rev.02